

# Meter Box Commercial IP43 Kiosk

## 750mm x 750mm x 300mm Surface

STOCK CODE: EBP0029

Suitable for electrical and commercial installations. Complies with the international standard for empty enclosures as applied to low-voltage switchgear and control gear assemblies (IEC 62208:2011)

### KEY FEATURES

- Electromagnetic compatibility, ideal for protecting internal electronic communication.
- Suitable for low-voltage switchgear and control gear assemblies, meters, compressors, etc.
- Will not corrode, weather resistant with an IP43 rating.
- High impact resistance up to 20 Kilojoules (IK10).
- Double insulation and electrically non-conductive (1000V).
- Triple lock system supported by non-corrosive vertical bars.
- Door hinges on right, 180° opening.
- Easily cleaned and can be painted.

### SPECIFICATONS

- Constructed from Glass Reinforced Plastic (GRP).
- Supplied with hinges, lock and key.
- Polyester back mounting plate (optional) available.
- Supplied in light grey colour (Ral 7035).
- Suitable for use in temperatures ranging from -30°C to +120°C.
- Made from non-hygroscopic material ensuring minimum water absorption.
- Constructed from halogen-free and self-extinguishing material.
- UV protected.

### ASSOCIATED PRODUCTS

[Backplate \(30.05.012BACK\)](#)

[Hockey stick](#)

### DIMENSIONS


750mm high x 750mm wide x 300mm deep.

The overall height of this box is 816mm.

The opening size is 719mm x 678mm\*.



**Example:** electrical indirect metering

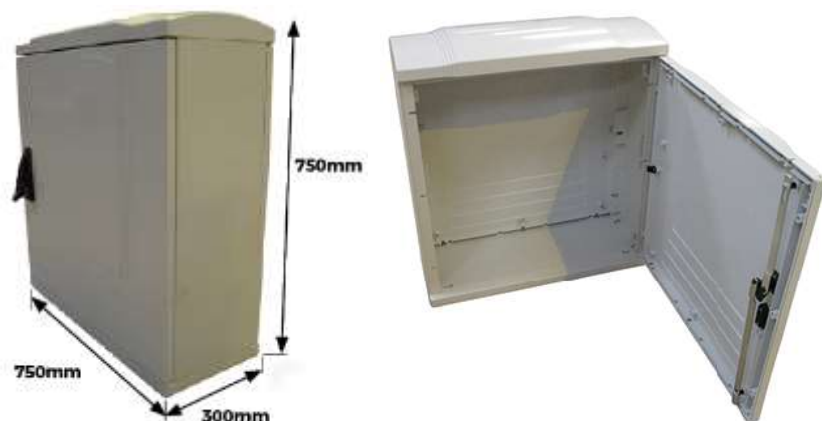

\* Approximate dimensions.


In accordance with MBD's normal policy of product development, these specifications are subject to change without notice.

# Meter Box Commercial IP43 Kiosk


750mm x 750mm x 300mm Surface

STOCK CODE: EBP0029

## ASSEMBLY INSTRUCTIONS

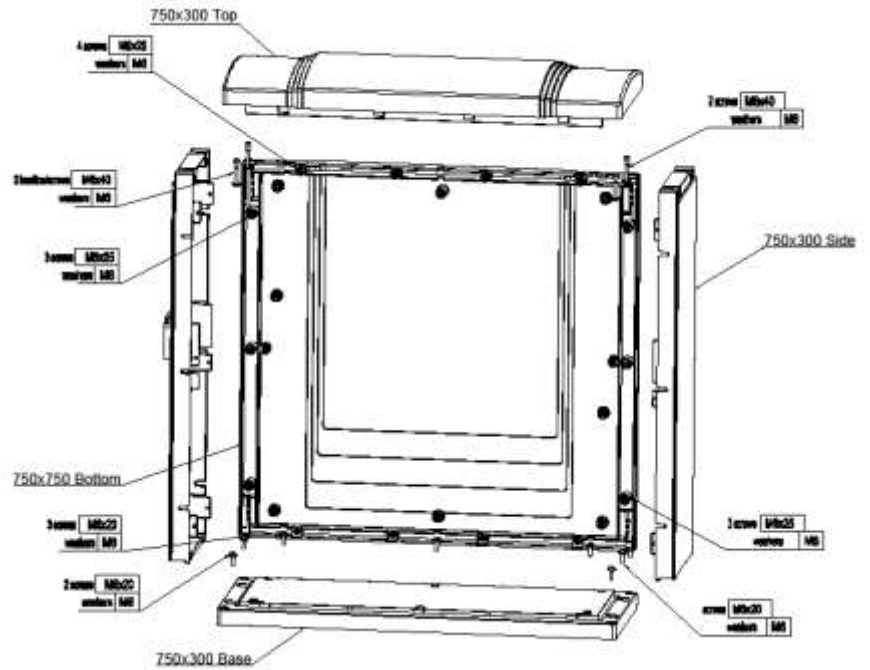

## DOOR ASSEMBLY

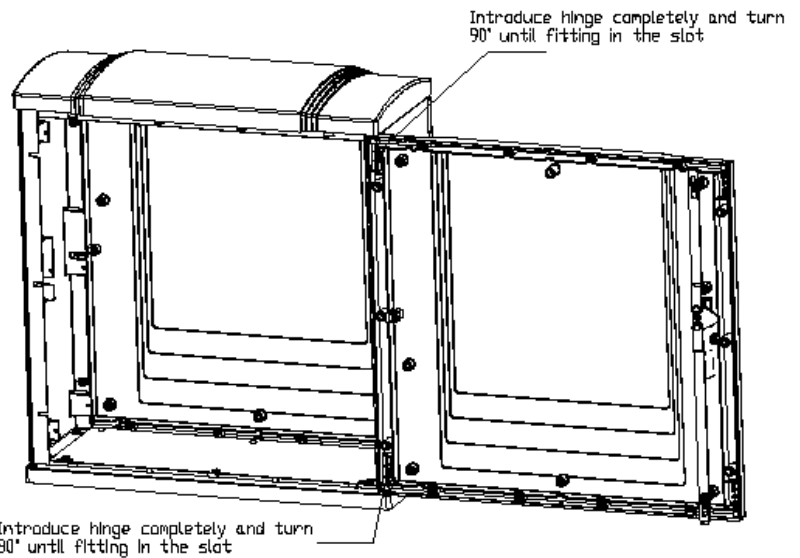

\* Approximate dimensions.  
In accordance with MBD's normal policy of product development, these specifications are subject to change without notice.