

Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions


This instruction is only for the installation of the seal to the Kiosk, this instruction should be carried out in parallel to the full assembly of the Kiosk.

Tools Required:

- Scissors or Knife

Step 1:

- Get the bag labelled **(BO-1-Bottom)**
- Trim seals to required length along front and back sections. Do not cover tabs.
- Remove the adhesive strip and apply slight pressure against the panel surface to ensure the seals adhere.

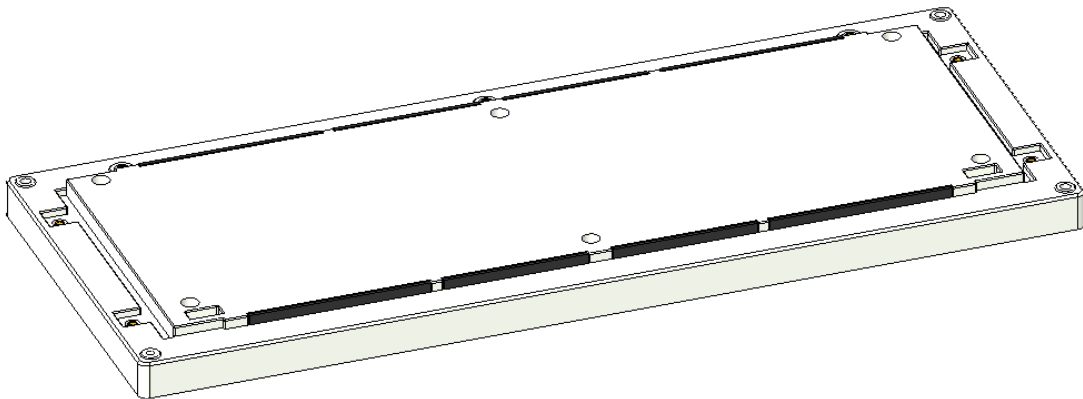

TRICEL
CONSTRUCTION

Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions

Step 2: Once two side panels are fitted you will need two seals on either side panel, a seal for the front and the rear of both panels will be needed.

Right Seal

- Starting with the right panel get the bag labelled (BO -4-LEFT&Right) and use the smaller of the two seals to begin with.
- Measure from the top of the side panel down to the bottom panel and cut seal to length.
- Once the seal is cut, remove the adhesive and apply to the surface keeping the pressure down to ensure the seal sticks.
- Locate larger seal and apply the seal to the rear of the panel as shown below.

Front Seal



Rear Seal



Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions

Left Seal

- Get the bag labelled **(BO-4-Left&Right)** and measure the length from top to bottom of the left panel.
- Remove adhesive strip and press onto surface ensuring it is even along the surface.



- Next, measure the distance from the end of the seal to the inside of the panel where no seal is evident.
- Cut two small tabs to make the front of the panel fully sealed.



Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions



- Finally, add seal to the bottom panel and meet the seal at side panel.
- Attach seal to the final left hand section as shown below.
- Then, apply seal to the final section on the right hand side



Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions

Step 3: Top Cover Seal

- To assemble the kiosk, get the top cover and the bag labelled **(BO-3-Back)**. The seal is pre-cut for assembling.
- Once the metal pins are in place, the seal should begin by going around the pins and following the flow of the panel.
- Once again, remove the adhesive tape and place pressure on the seal to ensure it sits correctly.



Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions

Step 4: Top Cover Seal

- When the top panel is fitted get the bag labelled **(BO-2-TOP)** and measure the sections along the top panel.
- Do not cover the tabs as this will be completed at a later step.



- Measure and cut the seal as shown in the image above.
- Once the seal is cut, remove the yellow tape and stick it to the surface.
- Ensure that the tab isn't covered and that the top of the seal is aligned with the bottom of the tab.
- Cut the shown tabs out from the top cover seal Cut the shown tabs out from the top cover seal



Cut out tabs as shown to
allow for full sealing

Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions


- Continue sealing along the front of the top cover until all sections are complete.



Step 5: Final sealing – final sealing is to be done on the top and bottom panel.

Bottom Panel

- Get bag labelled **(BO-1-Bottom)** and measure across until it meets the seal descending from the right-hand side panel.
- Remove the adhesive tape and stick to the tabs and seal already present.

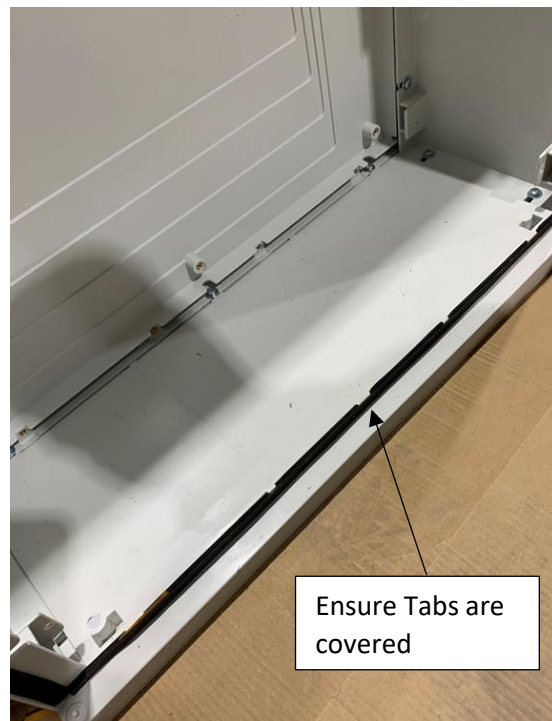

Tricel IP43 Electrical Kiosk with Seal

Assembly Instructions

Top Panel

- Like on the bottom panel, get bag labelled (BO-2-TOP) and begin on the left-hand side starting where the seal finishes on the side panel
- Measure along the top panel and cut where the seal meets the right panel.



Finished Product

