



MeterBoxesDirect.co.uk



Works with
Tricel and
Mitras **Mark
2 Recessed
Gas Meter
Boxes**

GRP OVERBOX

for Mark 2 Recessed Gas Box

GRP Overbox and Door to suit damaged recessed meter boxes.
This GRP Overbox (Door frame kit) comes with a tapered back to
fit standard Irish and UK Mark 2 Recessed Gas meter boxes.
Suitable for wall mounting.

COMPLIANT TO BS 8499:2017
STOCK CODE: 105141



TRICEL
GENERATIONS OF INNOVATION


GRP OVERBOX for Mark 2 Recessed Gas Box.

COMPLIANT TO BS 8499:2017

STOCK CODE: 105141



BUY ONLINE NOW

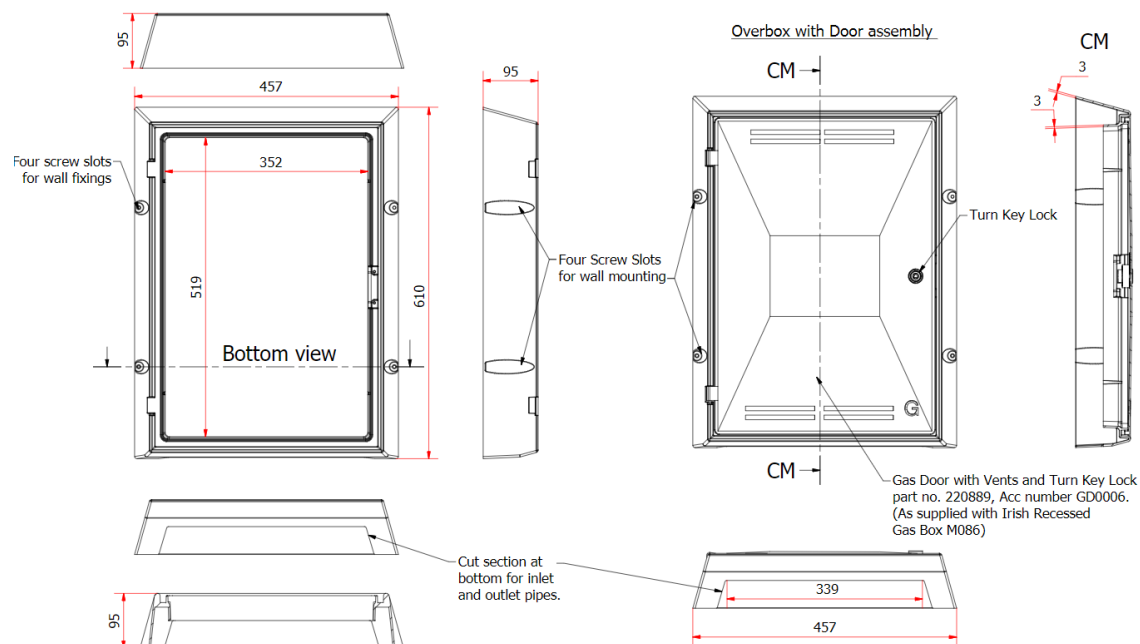

DIMENSIONS

610mm high x 457mm wide x 95mm deep

Internal dimensions = 519mm high x 352mm wide*

SPECIFICATION AND KEY FEATURES

- GRP Overbox, repair solution for damaged Mark 3 Recessed Gas Meter Boxes.
- Meets the requirements of British Standard BS 8499 : 2017.
- Constructed from SMC / GRP – Glass Reinforced Polymer.
- Will not corrode, weather-resistant.
- Easily cleaned.
- Hinges on left.
- Suitable for buildings with red bricks.

INSTALLATION

Step 1:

Ensure that the GRP Overbox you want to fit is correct for the box on the wall. The Damaged Box on the wall should be approximately:

- Height = 595mm to 600mm
- Width = 410mm to 412mm
- Depth (outside of box to wall) = 70mm to 75mm



TRICEL
GENERATIONS OF INNOVATION

* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: 0844 809 4206 | Email: onlinesales@meterboxesdirect.co.uk | www.meterboxesdirect.co.uk

105141-1210764/0-Mar2023

GRP OVERBOX for Mark 2 Recessed Gas Box.

COMPLIANT TO BS 8499:2017

STOCK CODE: 105141



BUY ONLINE NOW



Step 2:

Remove the existing door, clean the box architrave and inspect for damage. Any damage (holes or cracks) should be filled using a 4-hour Fire Retardant Silicone to ensure that water does not enter the cabinet.

Step 3:

After unpacking the GRP Overbox, remove the door. This can be done by depressing the brass insert hinge with a narrow screwdriver.



Step 4:

Place the GRP Overbox over the damaged box on the wall. Ensure that you have a good fit (incorrect installation of the box on the wall may hinder this).



Step 5:

Mark the holes on the wall from the overbox fitting holes.



Step 6:

Drill holes using M6 Drill bit at a depth of 30mm



Step 7:

Insert supplied wall plugs into the wall.



TRICEL
GENERATIONS OF INNOVATION

* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: 0844 809 4206 | Email: onlinesales@meterboxesdirect.co.uk | www.meterboxesdirect.co.uk

105141-1210764/0-Mar2023

GRP OVERBOX for Mark 2 Recessed Gas Box.

COMPLIANT TO BS 8499:2017

STOCK CODE: 105141



BUY ONLINE NOW



STEP 8

Step 8:

Align the overbox to the holes drilled on wall, and fix to the wall using supplied M5x30mm screws.



STEP 9

Step 9:

Close the door.

Step 10:

You may need to seal the architrave to the wall to fill in gaps. Only FR200 4-Hour Fire Retardant Silicone is recommended.

ASSOCIATED PRODUCTS



Spare key (170000)



**4-Hour Fire Retardant
Silicone (106164)**