



MeterBoxesDirect.co.uk



## **GRP ELECTRIC ARCHITRAVE OVERBOX BY TRICEL**

SUITABLE FOR TRICEL/MEDIUM PERMALI AND  
WAVIN BOXES

STOCK CODE: EB0025




# GRP ARCHITRAVE OVERBOX BY TRICEL

SUITABLE FOR TRICEL/MEDIUM PERMALI  
AND WAVIN BOXES  
STOCK CODE: EB0025



BUY ONLINE NOW

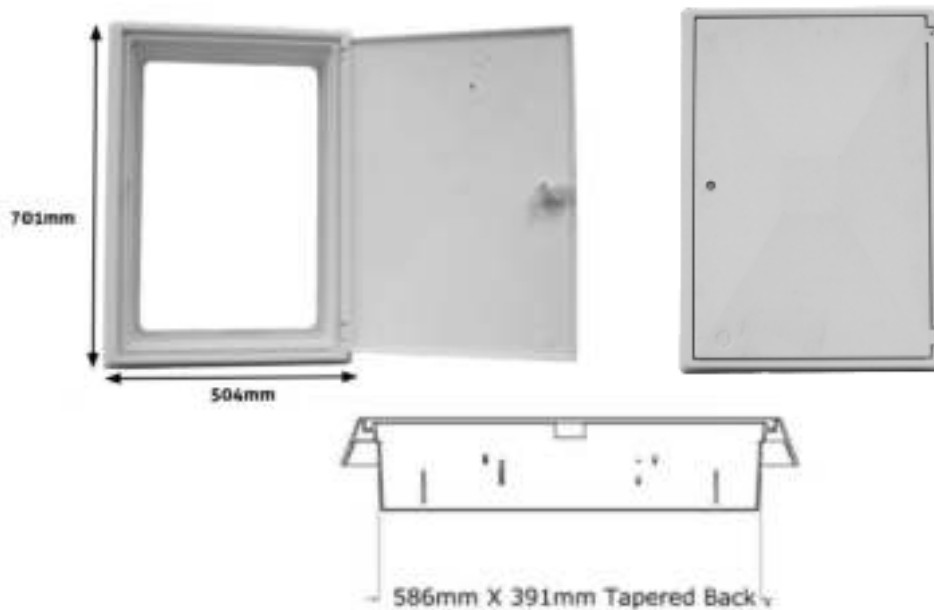

## DIMENSIONS

701mm high x 504mm wide.

### The GRP Archtrave overbox contains the following:

1 x frame, 1 x door, 1 x 310mm Silicone, 1 x short reach key,  
4 x 3/4" screws & 1 x carton



Watch on youtube

## INSTRUCTIONS

1. Clean the inside of the frame of existing meter box with a cloth. See figure 1.
2. Apply Silicone around the frame of the GRP Archtrave Overbox. Put the nozzle of the cartridge touching the archtrave edge. Apply a thick bead of silicone. See Figure 2.
3. Apply a thick bead of Silicone in the top and bottom corners. See figure 3.
4. Slide the GRP Archtrave Overbox in place into the existing meter box (Check that the GRP Archtrave Overbox is in its correct orientation). See Figure 4.
5. Drill 4 holes with a diameter 3.5mm drill bit in the moulded slots. See Figure 5.
6. Secure the GRP Archtrave Overbox in place with self-tapping screws. See Figure 6.
7. Attach the meter box door to the GRP Archtrave Overbox and close. See Figure 7.



**TRICEL**  
CONSTRUCTION

\* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: 0844 809 4206 | Email: [onlinesales@meterboxesdirect.co.uk](mailto:onlinesales@meterboxesdirect.co.uk) | [www.meterboxesdirect.co.uk](http://www.meterboxesdirect.co.uk)

220903-1178151/01-MBD-APR2023