



MeterBoxesDirect.co.uk



IP66 ELECTRICAL ENCLOSURE BY TRICEL

400x300x200mm Surface

FIRE RETARDANT TO BS 476, PART 7, 1997, CLASS 2

STOCK CODE: 105018



IP66 ELECTRICAL ENCLOSURE BY TRICEL

400x300x200mm Surface
Fire retardant to BS 476, Part 7, 1997, Class 2
STOCK CODE: 105018



BUY ONLINE NOW

Compliant with IEC 62208 (2011) - Empty enclosures for low-voltage switchgear and control gear assemblies.


DIMENSIONS

Internal dimensions: 366mm high x 256mm wide x 183mm deep
Outside dimensions: 400mm high x 300mm wide x 200mm deep

SPECIFICATIONS

- IP66 rating suitable (EN 60529) for electrical installations.
- Certification of compliance with IEC 62208 (2011).
- Suitable for indoor or outdoor use.
- Constructed from fire retardant GRP – Glass Reinforced Polymer.
- Fire retardant to BS 476, Part. 7, 1997, Class 2.
- Will not corrode, weather resistant.
- Complete with hinges, lock and key.
- Supplied with backboard, ready to be assembled.
- Suitable for meters, electrical equipment, compressors, CCTV, industrial automation, marine etc.

Note: any electrical equipment fitted to Tricel enclosures must be completed by an appropriately qualified person.

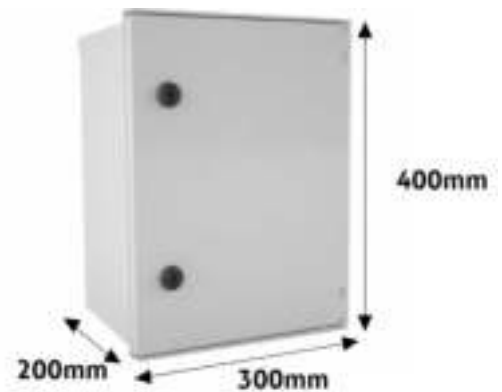

IP66 Electrical Meter Box



* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: 0844 809 4206 | Email: onlinesales@meterboxesdirect.co.uk | www.meterboxesdirect.co.uk

IP66 ELECTRICAL ENCLOSURE BY TRICEL


400x300x200mm Surface
Fire retardant to BS 476, Part 7, 1997, Class 2
STOCK CODE: 105018



BUY ONLINE NOW

ASSEMBLY


FITTING THE HINGES:

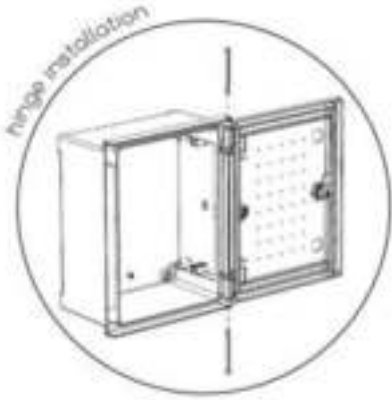

1. Align the door to the hinges on the enclosure.
2. Push the supplied pins into place, ensuring they go through both enclosure hinge and door.
3. Tap lightly with a hammer if necessary.
4. Follow the same procedure for the bottom hinge.



INSTALLING THE BASE PLATE:

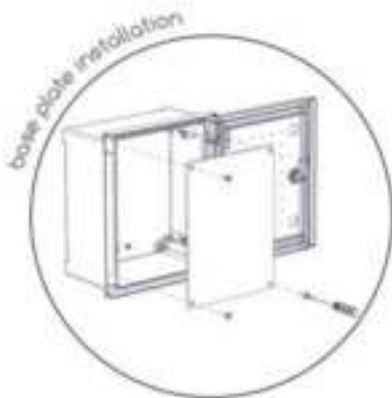

1. Get the supplied polyester base plate and align it with the holes in the enclosure.
2. Using the provided screw, align with the holes and screw into place.
3. Tighten with a drill or screwdriver.



TRICEL
CONSTRUCTION

* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: 0844 809 4206 | Email: onsales@meterboxesdirect.co.uk | www.meterboxesdirect.co.uk

105018-1243607/0-MBD-JUL2022