



**TRICEL**  
CONSTRUCTION

# IP43 Kiosk 750mm x 500mm x 300mm

STOCK CODE: EBP0026

## SPECIFICATION AND KEY FEATURES


- Robust kiosk with IP43 rating suitable for electric installations.
- Constructed from GRP – Glass Reinforced Plastic.
- Suitable for all meters, compressors, etc.
- Will not corrode, weather resistant.
- Easily cleaned and can be painted.
- Complete with hinges, lock and key
- This Kiosk comes as self-assembly only.
- Ral 7035.
- -30°C to + 60°C.
- Halogen Fee.
- Hinges on right.

## INSTALLATION

1. Remove all components from the box and place on a flat surface.
2. Taking the base and using the M6 x 20 screws and M6 washers provided, attach both sides to the base using a screwdriver.
3. The next piece needed is the box rear. With both sides attached and screwed in place do the same with the box rear. This time use M6 x 20 screws and M6 washers to attach the rear to the base and M6 x 25 screws and M6 washers to attach the rear to the sides.
4. Next remove the top from its protective wrapping and place it on top of the assembly. This time M6 x 40 screws and M6 washers will be needed. Before moving on to the next stage, make sure the first four components are securely fit together.
5. Now taking the door attach it. The door is attached at the hinge joint at the front right of the box. Introduce the door hinge completely and turn 90 degrees until it fits comfortably in the slot.

## DIMENSIONS

750mm high x 500mm wide x 300mm deep.  
The overall height of this box is 816mm.  
The opening size is 721mm x 428mm\*.

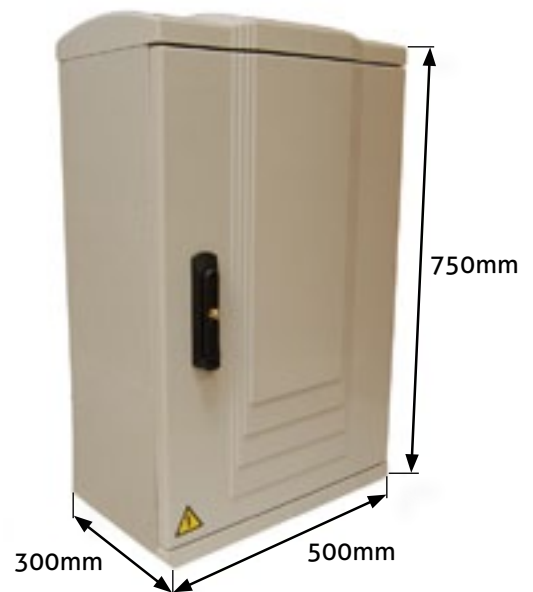

\* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: +44 (0) 1453 791 616 | Email: [sales@uk.tricel.eu](mailto:sales@uk.tricel.eu) | [www.uk.tricel.eu](http://www.uk.tricel.eu)